




WSK5324S Specifications

Anti Static Mat • Wrist Strap • Common Point Ground

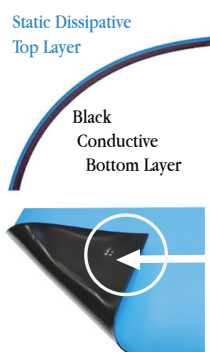

5300 Series Mats are grounded by installing Push In Ground Snaps so that a common point ground system can be installed.



5300 Series Anti Static Mat Specifications

Physical Properties	Units	Typical Values	Test Method
Thickness	Inches	.080	ASTM D-2103
Tensile Strength • Top Layer	kg / sq. cm	> 120	ASTM D-412
Tensile Strength • Bottom Layer	kg / sq. cm	> 160	ASTM D-412
Tear Strength • Top Layer	kg / cm	> 90	ASTM D-412
Tear Strength • Bottom Layer	kg / cm	> 100	ASTM D-412
Elongation • Top Layer	%	350	ASTM D-412
Elongation • Bottom Layer	%	250	ASTM D-412
Hardness • Top Layer	-	50	ASTM D-2240
Hardness • Bottom Layer	-	60	ASTM D-2240
Gravity • Top Layer	-	1.3	ASTM D-792
Gravity • Bottom Layer	-	1.4	ASTM D-792
Electrical Properties	Units	Typical Values	Test Method
Surface Resistivity • Top Layer	ohms / sq.	$< 10^9$	ASTM D-257
Surface Resistivity • Bottom Layer	ohms / sq.	$< 10^5$	ASTM D-491
Volume Resistivity • Top Layer	ohms / sq.	$< 10^8$	ASTM D-257
Volume Resistivity • Bottom Layer	ohms / sq.	$< 10^4$	ASTM D-257
Static Decay	seconds	< 0.01	EIA-541
Temperature Tolerance	Farenheit	500° for 10 minutes	

- This product meets the ANSI/ESD S20.20 STM S4.1 Standard using FTMS 101C Method 4046

MAIL: 1318 Kenton Street Springfield, OH 45505 E-MAIL: sales@4bennett.com WEBSITE: 4bennett.com

TOLL FREE: (888) 423-6638 OFFICE: (937) 324-1100 FAX: (937) 324-8753



WSK5324S Specifications

Anti Static Mat • Wrist Strap • Common Point Ground



240-006 Series Wrist Strap and Common Point Ground Specifications

Wrist Strap		Measurement	
Fabric		Polyester with Silver-Plated Nylon	
Color		Blue	
Resistance		100 Ohms	
Contact		360° Degrees Around Wrist	
Back Plate		Stainless Steel, 4mm	
Snap		4mm	
Snap Release		1-5 lbs	
Grounding Cord for Wrist Strap		Measurement	
Color		Black	
Cord Length		6 feet	
Resistor		1 Meg Ohm	
Snap		4mm	
Banana Plug		360° Degrees Swivel	
Common Point Ground		Measurement	
Color		Black	
Cord Length		15 feet	
Resistor		1 Meg Ohm	
Ground Terminal		#10 Ring	
Snap		10mm	
Wire Insulation		Polyurethane (PU) / Polyvinyl chloride (PVC)	

MAIL: 1318 Kenton Street Springfield, OH 45505 E-MAIL: sales@4bennett.com WEBSITE: 4bennett.com

TOLL FREE: (888) 423-6638 OFFICE: (937) 324-1100 FAX: (937) 324-8753