




ESD Conductive Grid Tape

Sold in Sleeves

Product Specifications	
Measurement	Value
Thickness	1.9 mils
Adhesive	acrylic based
Grid Material	oriented polypropylene
Conductivity of Grid Layer	10^3 to 10^4 Ohms / S1 (ASTM D-257)
Resistivity of Anti Static Layers	$\leq 10^9$
Maximum Temperature	60° C / 140° F
Core Size	74mm / 3 inches
Electricals	< 1.OE + 12 (Top Side) < 1.OE + 9 (Tacky Side)
Tribocharging	< 100 Volts (Top Side) < 100 Volts (Tacky Side)

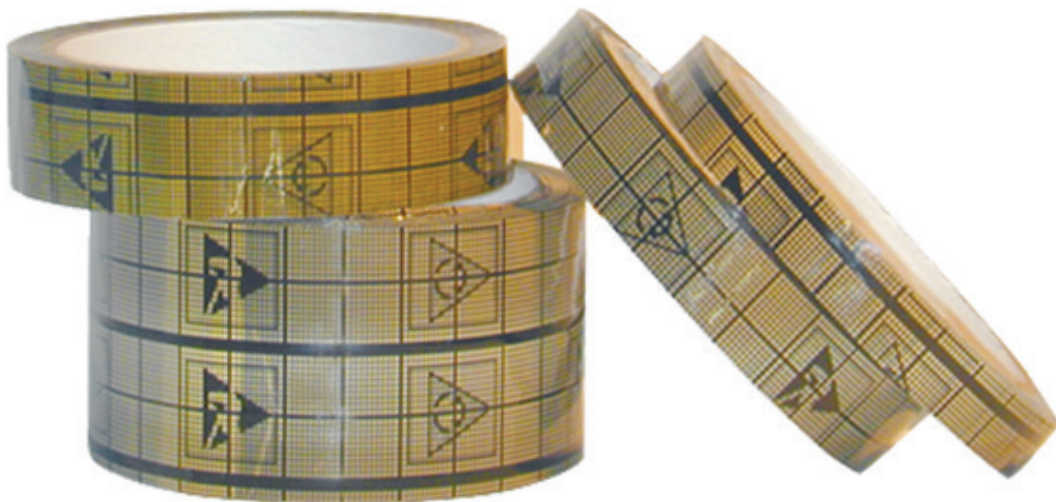

MAIL: 1318 Kenton Street Springfield, OH 45505 E-MAIL: sales@elimstat.com WEBSITE: elimstat.com

TOLL FREE: (888) 423-6638 OFFICE: (937) 324-1100 FAX: (937) 324-8753